

ApeosPort-V 7080 / 6080



ApeosPort-V 7080 / 6080

Superior productivity through leading-edge simplicity

ApeosPort-V 7080 / 6080



Fast, highly durable and with versatile finishing options

A Fuji Xerox monochrome multifunction device equipped with a top-tier engine. High-speed processing of up to 75 pages per minute for copying and printing. High-speed scanning of 100 ppm*² for simplex and 200 ppm*² for duplex, for both colour and monochrome originals. Superior durability enables long hours of stable, continuous printing of up to 8600 sheets. In addition, Finisher can be attached to provide a wide range of finishing options. This reliable device functions as your main office machine for different types of output.

Copy Print B / W : 75 ppm*¹

Fax Super G3

Scan Colour, B / W : 100 ppm*²
One-pass duplex scanning: 200 ppm*²

*1: A4 landscape. With ApeosPort-V 7080. 65 ppm with ApeosPort-V 6080.

*2: For Fuji Xerox standard document (A4 landscape) saved in a Folder at 200 dpi.


* The picture shows the multifunction device with options: a large control panel, two high-capacity trays and a C3 Finisher.



A new way of working

On the road, at home, dashing off to a client in the morning, or returning home in the evening. There's no doubt about it:

Workstyles are changing. To support people in all facets of their jobs, Fuji Xerox offers comprehensive mobile computing functions and keeps everyone connected via the Cloud. We always look for ways to help bring out your best, wherever and however you work.

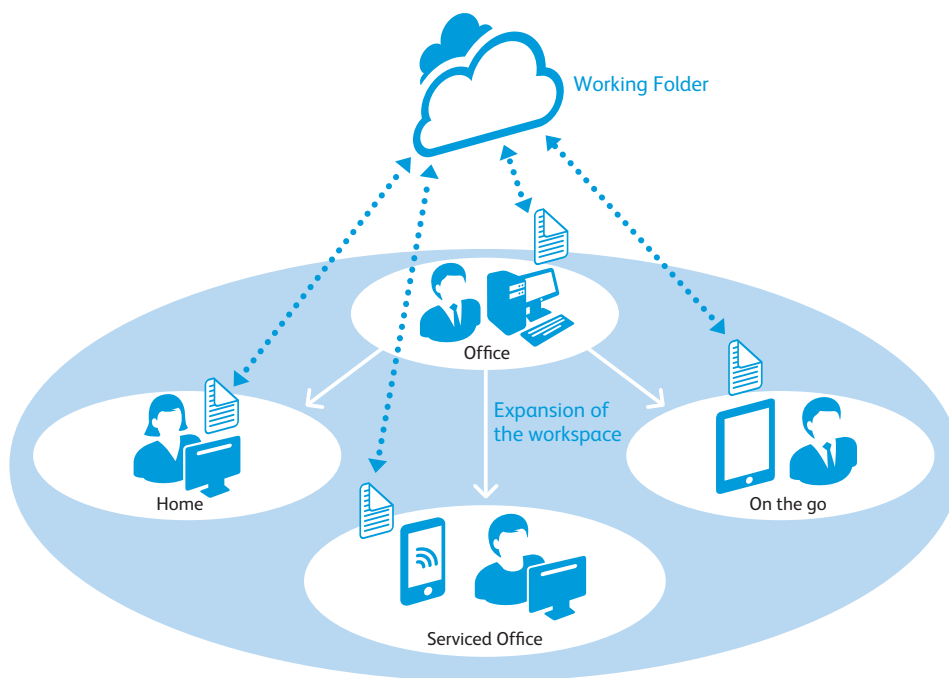

Smooth, impressive client presentations

Eliminate the hassle and worry of lugging around bulky, confidential documents.

Working Folder, our Cloud-based document sharing service, keeps your documents secure and your briefcase light.

Use a PC or Fuji Xerox multifunction device to store documents in Working Folder, then access and view with a smart device while at your client's office.

You can also print from a tablet or smartphone to multifunction devices when out of the office via wireless LAN.

ApeosPort for simplified, secure document management

Featuring excellent scalability and customisability, ApeosPort boasts a galaxy of functions that also streamline management tasks and secure confidential information.

Users can now focus on work, assured of fast, easy access to shared information across the entire company.

- Link with an external authentication server
- Register frequently performed tasks for smoother workflows
- Encourage cost-cutting
- Restrict user permissions and limit printing/copying
- Log usage to monitor operations

More features, simplified operation



Easy Fingertip Control

The new ApeosPort-V series takes advantage of technology seen in smartphones and tablets by enabling users to operate the devices intuitively, for faster and more efficient production. Four different gestures – tap, double-tap, drag and flick – can be used to scroll and switch functions smoothly and quickly.

Making multifunction devices easier to use


Simpler operations

Operation screens can be simplified and made easier than ever to navigate by installing a free optional software application – EasyUI Solution. This offers individual users a simple and easy-to-use operation screen, reducing working time.


* Available as a free download from our official website.




Preview finished results — for example, N-up or two-sided — before copying.



“Custom Menu” allows individual users to place frequently used functions on the menu screen.



Assign single touch buttons with commonly-used workflows for simple and quick operation.




Scanning is now much simpler with the automatic recognition of both the orientation and number of printed sides of the original document.

Print from any device on demand

The Serverless On-Demand Print solution will provide secure printing functionality on up to five supported Fuji Xerox multifunction devices. By restricting print jobs from being printed until the user has authenticated at the MFD by logging on through password, PIN, or proximity (ID) card. You can easily ensure security around any printed document, while eliminating the printing of unwanted print jobs.

* Optional.

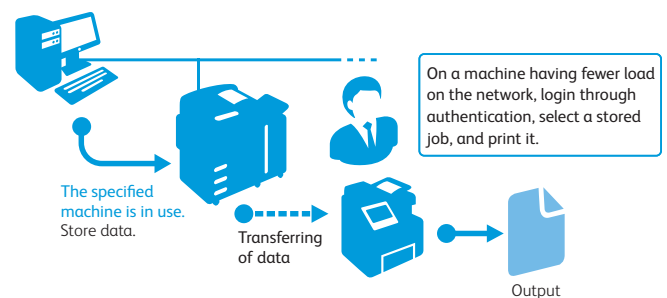

Print in different environments

The ApeosPort-V series can be shared and printing can be performed in two independent network environments. With two network ports, you can maximise the use of the multifunction device while maintaining tight security of having separate networks.

* Optional.

* Print function only. Supported protocol: TCP/IP (lpd, Port9100) only.

Scan more efficiently

On board scanning solutions

Dramatically increase your workflow efficiency with these onboard scanning solutions: on-box Optical Character Recognition with searchable PDF creation; secure PDF; scan to USB device; Scan to Email, Folder, and Network*. Plus, single pass scanning simultaneously scans both sides of two-sided documents, while high compression technology reduces file sizes.

*Optional accessories may be required.

Conversion to editable Word® and Excel® files

Scanned documents can be converted to Microsoft Word® and Excel® format so you can edit them easily*. Documents can be retrieved from your server and easily used, saving time and hassle for users by eliminating rekeying chores.

* Optional.

Walk-up simplicity

Print from and scan to any USB memory device for faster document delivery when you're not at your computer.

* Optional.



Mobile and Cloud applications

Google Cloud Print™

ApeosPort-V Series devices will connect with Google Cloud Print™, so you can print on the go from your smartphone or computer using Google Cloud Print enabled apps.




* iOS and Android™ devices as well as PCs can be used to output via Google Cloud Print™.

* Google Cloud Print™ is a web-based print service provided by Google Inc.

Mobile printing and scanning at your fingertips

Fuji Xerox Print Utility for iOS and Android is a free printing & scanning application for mobile devices. Web pages, photos and PDF files in your mobile device can be printed from the device.

* Print Utility for iOS and Print Utility for Android can be downloaded for free from App Store and Google Play™, respectively.

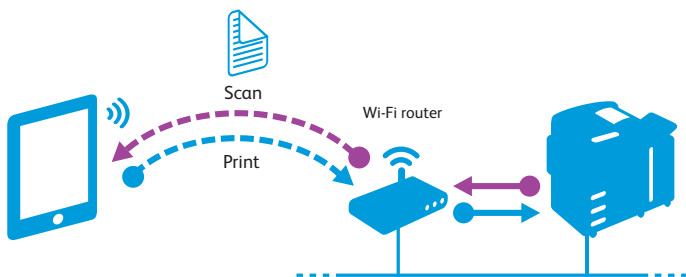

Fax more effectively

Convenience and efficiency of paperless faxing

[Receiving]

Received fax documents can be sorted into different device folders by dial number or G3ID. After viewing the thumbnails, users can choose to print only designated documents. As soon as fax documents are received in a folder, they can also be sent as a fax, printed, sent as an e-mail, transferred via FTP, and transferred via SMB automatically.

[Sending]

Direct Fax (sending fax directly from PC) can also be used. Sent fax documents can also be saved as PDF and sent as e-mail attachments.

[Reject]

Allows administrators to block incoming faxes from certain numbers and anonymous numbers.

AirPrint

Print directly from an iOS device via wireless LAN.


This eliminates the need to open data on a PC, download special software, or install a dedicated driver.



* AirPrint is a standard print function included in iOS on iPhones and iPads.

Direct access from ApeosPort-V to cloud



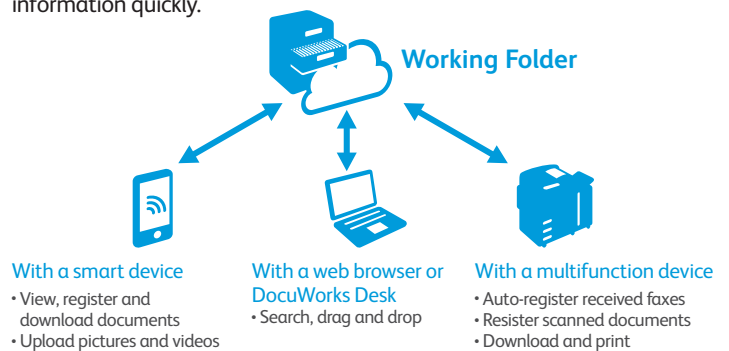


By registering documents to "Working Folder", a cloud service offered by Fuji Xerox by subscription, users can view documents from their smartphones and tablet devices, even while they are away from their office. Faxed and scanned documents can also be registered directly from ApeosPort-V to Working Folder, so that several people can share the information quickly.



*This function requires the Working Folder Service contract.

Options

Offering further finishing outputs including Z Fold and Tri-fold with the new C3 Finisher

	C3 Finisher	C3 Finisher with Booklet Maker	C3 Finisher with Booklet Maker + Folder Unit CD1	D2 Finisher + Folder Unit D2	D2 Finisher with Booklet Maker + Folder Unit D2
					
Stapling thickness	50 or 65 sheets* ³	50 or 65 sheets* ³	50 or 65 sheets* ³	100 sheets* ⁴	100 sheets* ⁴
Auto staple cutter	—	—	—	○	○
Punch	2/4 hole punch* ¹ or 2/3 hole punch* ²	2/4 hole punch* ¹ or 2/3 hole punch* ²	2/4 hole punch* ¹ or 2/3 hole punch* ²	2/4 hole punch or 3 hole punch* ⁵	2/4 hole punch or 3 hole punch* ⁵
Saddle Staple	—	○	○	—	○
Single Fold	—	○	○	—	○
Tri-fold	—	—	○* ⁶	○* ⁷	○* ⁷
Z Fold Half sheet	—	—	○* ⁶	○* ⁷	○* ⁷
Cover/Slip sheet interposer	—	—	—	○	○
Tray capacity* ⁷	Output tray	500 sheets	500 sheets	500 sheets	500 sheets
	Finisher tray	3000 sheets	1500 sheets	1500 sheets	2000 sheets

*1: 2/4 Hole Punch Kit is required. *2: US 2/3 Hole Punch Kit is required. *3: C3 Finisher Staple Unit 65 sheets is required. *4: Less sheets when Z-Folded sheets are mixed. *5: US 3 Hole Punch Kit is required. *6: Folder Unit CD1 is required. It can be attached to C3 Finisher. *7: Folder Unit D2 is required. *8: 64 gsm paper. Note: C3 Finisher or C3 Finisher with Booklet Maker requires Transport Unit S1.

Standard paper capacity of 4350 sheets

Standard four trays can hold up to 4350 sheets*, while the bypass holds another 100 sheets*.

An optional 2000-sheet high-capacity feeder is also available.

* 80 gsm paper.



8600-sheet capacity allows large-volume output

A maximum of seven trays can hold up to 8600 sheets of paper. This minimises the need to refill paper when printing large-volume jobs.



Environmentally responsible

Smart energy saving

The new ApeosPort-V series uses Smart Energy Management to power only the functions requested by users. This reduces power consumption and CO₂ emissions. To minimise noise, the scanning and output devices do not generate noise when not operating.



Fast recovery of control panel

This activates the control panel in about 3 seconds after pressing Power Save button — another smart way to ensure eco-friendly operation.

Excellent TEC* with lower energy consumption

The ApeosPort-V 6080 has achieved 4.7 kWh for TEC value*, conforming to International ENERGY STAR Program standards and reducing power consumption.

* Value measured by the test defined in International ENERGY STAR Program.

Visualise eco-friendly operation

Check the degree of eco-friendliness when printing via a five-step scale. The more leaves shown, the more eco-friendly the operation.

* Requires Document Monitor to be installed on PC. (Software included on bundled DVD.)



TEC value ApeosPort-V 7080 5.2 kWh
 ApeosPort-V 6080 4.7 kWh

Specifications of ApeosPort-V 7080 / 6080

Basic Specifications/Copy Function

Item	ApeosPort-V 7080	ApeosPort-V 6080	
Type	Console		
Memory capacity	4 GB (Max. 4 GB)		
Hard disk capacity*1	160 GB or larger (Used space : 128 GB)		
Scan Resolution	600 × 600 dpi		
Printing Resolution	2400 dpi or equivalent x 600 dpi		
Warm-up Time	30 seconds or less. 30 seconds or less if the main power is on (At room temperature 23°C)		
Original Size	Maximum of 297 x 432 mm (A3, 11 x 17") for both Sheet and Book		
Paper Size	Max.	A3, 11 x 17", [12 x 18" (305 x 457 mm) when using Bypass Tray]	
	Min.	A5 [Postcard (100 x 148mm), Quadrate NO. 3 when using Bypass Tray]	
Image loss width	Lead Edge 4.0 mm, Trail Edge 4.0 mm, Right & Left Edges 4.0 mm		
Paper Weight*2	Tray 1, 2, 3, 4	52 to 200 gsm	
	Bypass Tray	52 to 250 gsm	
First Copy Output Time	3.0 sec. (A4 LEF)		
Continuous Copy Speed*3	B5 LEF	79 ppm	68 ppm
	A4 LEF	75 ppm	65 ppm
	A4/B5	55 ppm	47 ppm
	B4	44 ppm	39 ppm
	A3	37 ppm	33 ppm
Paper Tray Capacity*4	Standard	500 sheets x 2-tray + 1490 sheets + 1860 sheets + Bypass Tray 100 sheets	
	Optional	HCF (A4 1 Tray) : 2000 sheets HCF (A4 2 Tray) : 2000 sheets x 2-tray	
	Max.	8600 sheets [4 Tray Module + HCF (A4 2 Tray)*5]	
Output Tray Capacity*4,5	500 sheets (A4 LEF) (Catch Tray)		
Power Supply	AC220-240 V +/- 10 %, 10 A, 50 / 60 Hz common		
Maximum Power Consumption	2.2 kW or less (AC220 V +/- 10 %) 2.4 kW or less (AC240 V +/- 10 %) Sleep Mode : 2.0 W or less Low Power Mode*7 : 162 W or less		
Dimensions	W 620 x D 804 x H 1153 mm		
Weight*8	195 kg		

*1: The Storage Hard disk capacity is not totally available for customers. *2: It is encouraged to use paper recommended by Fuji Xerox. Printing may not be performed correctly depending on the use conditions. *3: The speed may be reduced due to the image quality adjustment. The performance may be reduced depending on the paper type. *4: 80 gsm paper. *5: When the HCF (A4 2 Tray) is used, the Bypass Tray capacity is 250 sheets. *6: 64 gsm paper. *7: Low Power Mode is not set at the time of shipment from the factory. *8: Excluding Toner Cartridge and output tray.

Print Function

Item	Description	
Type	Built-in type	
Continuous Print Speed*1	Same as the Basic Specifications / Copy Function	
Printing Resolution	1200 × 1200 dpi	
Page Description Language	Standard PCL5, PCL6, Adobe® PostScript® 3™	
Supported Operating System*2	PLC6-Driver (Standard)	Windows Server® 2003 (32bit), Windows Vista® (32bit), Windows Server® 2008 (32bit), Windows® 7 (32bit), Windows® 8 (32bit), Windows® 8.1 (32bit), Windows Server® 2003 (64bit), Windows Vista® (64bit), Windows Server® 2008 (64bit), Windows® 7 (64bit), Windows Server® 2008 R2, Windows® 8 (64bit), Windows Server® 2012 (64bit), Windows® 8.1 (64bit), Windows Server® 2012 R2 (64bit)
	Mac OS X-Driver (Standard)	Mac OS X 10.5 Leopard, Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, OS X 10.8 Mountain Lion, OS X 10.9 Mavericks
	Adobe® PostScript™ 3 Driver (Optional)	Windows Server® 2003 (32bit), Windows Vista® (32bit), Windows Server® 2008 (32bit), Windows® 7 (32bit), Windows® 8 (32bit), Windows® 8.1 (32bit), Windows Server® 2003 (64bit), Windows Vista® (64bit), Windows Server® 2008 (64bit), Windows® 7 (64bit), Windows Server® 2008 R2, Windows® 8 (64bit), Windows Server® 2012 (64bit), Windows® 8.1 (64bit), Windows Server® 2012 R2 (64bit), Mac OS X 10.5 Leopard, Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, OS X 10.8 Mountain Lion, OS X 10.9 Mavericks
Interface	Standard	Ethernet 100BASE-TX / 10BASE-T, USB2.0
	Optional	Ethernet 1000BASE-T

Note: WSD stands for Web Services on Devices.

Note: XPS stands for XML Paper Specification.

*1: The speed may be reduced due to the image quality adjustment. The speed may also be reduced depending on the document attributes. *2: Please refer our official website for the latest supported OS.

Scan Function

Item	Description	
Type	Colour Scanner	
Original Size	600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 200 dpi	
Scan Speed*1	B/W : 100 ppm, Colour : 100 ppm 1 pass, 2 sided scanning : B/W : 200 ppm, Colour : 200 ppm [Fuji Xerox Standard Paper (A4 LEF), 200 dpi, to Folder.]	
Interface	Standard	Ethernet 100BASE-TX / 10BASE-T
	Optional	Ethernet 1000BASE-T

Note: XPS stands for XML Paper Specification.

*1: The scanning speed varies depending on the documents.

Fax Function (Optional)

Item	Description
Original Size	Max. : A3, Long document (Longest 600 mm)
Recording Paper Size	Max. : A3, 11 x 17" Min. : A5
Transmission Time	2 seconds and more but fewer than 3 seconds*1
Transmission Mode	ITU-T G3
Applicable Lines	Telephone subscriber line, PBX, Fax communication (PSTN), Max. 3 port*3 (G3-3port)

*1: When A4 size document with approximately 700 characters is transmitted in standard image-quality (8 x 3.85 lines / mm) and in high-speed mode (28.8 kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition. *2: No. of FAX lines is up to 3 ports. Port refers to number of channels for FAX.

Duplex Automatic Document Feeder

Item	ApeosPort-V 7080	ApeosPort-V 6080
Original Size	Max. : A3, 11 x 17" Min. : A5*1	
Paper Weight	38 to 200 gsm (In Duplex : 50 to 200 gsm)	
Capacity*2	250 sheets	
Feeding Speed	75 ppm (A4 LEF Simplex)	65 ppm (A4 LEF Simplex)

*1: The minimum custom size is 139.7 x 139.7 mm. *2: 64 gsm paper.

HCF (A4 1 Tray) (Optional)

Item	Description
Paper Size	A4 LEF, Letter LEF, B5 LEF
Paper Weight	52 to 200 gsm
Dimensions	W 389 x D 610 x H 380 mm
Weight	29 kg

HCF (A4 2 Tray) (Optional)

Item	Description
Original Size	A4 LEF, Letter LEF, B5 LEF, 7.25 x 10.5" LEF (267 x 184 mm)
Paper Weight	52 to 200 gsm, Bypass Tray : 52 to 250 gsm
Dimensions	W 600 x D 694 x H 990 mm
Weight	72 kg

Offset Catch Tray (Optional)

Item	Description
Paper Size	Max. : A3, 12 x 18" (305 x 457 mm) Min. : Postcard (100 x 148mm)
Paper Weight	52 to 250 gsm
Paper Capacity*1	500 sheets

*1: 64 gsm paper.

Folder Unit D2 (Optional)

Item	Description	
Folding	Z Fold Half Sheet	Paper Size : A3, 11 x 17", B4 Paper Weight : 60 to 90 gsm
	Tri-fold	Paper Size : A4, Letter Paper Weight : 60 to 90 gsm
Paper Capacity*1	Tri-fold	40 sheets
Dimensions*2	W 200 x D 725 x H 1165 mm	
Weight	40 kg	

Note Optional for D2 Finisher / D2 Finisher with Booklet Maker.

*1: 64 gsm paper. *2: The size of width and height when Finisher is installed.

Folder Unit CD1 (Optional)

Item	Description	
Folding	Z Fold Half Sheet	Paper Size : A3, 11 x 17", B4 Paper Weight : 60 to 90 gsm
	Tri-fold	Paper Size : A4, Letter Paper Weight : 60 to 90 gsm
Paper Capacity*1	Tri-fold	40 sheets
Power Supply*2	AC220-240 V, 0.6 A, 50 / 60 Hz common	
Maximum Power Consumption	120 kW or less (AC 220 - 240 V +/- 10 %)	
Dimensions*3	W 232 x D 726 x H 991 mm	
Weight	53 kg	

Note: Optional for C3 Finisher / C3 Finisher with Booklet Maker.

*1: 64 gsm paper. *2: Power supply separate from the main unit is required. *3: The size of width and height when Finisher is Adobe® PostScript® 3™ installed.

Customer Expectation Document (CED)

For detailed product specifications, optimum performance parameters and service clearances refer to the Customer Expectation Document.

Specifications of ApeosPort-V 7080 / 6080

C3 Finisher / C3 Finisher with Booklet Maker (Optional)

Item	C3 Finisher	C3 Finisher with Booklet Maker
Type	Output Tray	Sort / Stack
	Finisher Tray	Sort (Offset available) / Stack (Offset available)
	Booklet Tray	- / Sort / Stack
Paper Size	Output Tray	Max.: A3, 12 x 18" (305 x 457 mm) Min.: Postcard (100 x 148mm)
	Finisher Tray	Max.: A3, 12 x 18" (305 x 457 mm) Min.: B5
	Booklet Tray	Max.: A3, 12 x 18" (305 x 457 mm) Min.: B5
Paper Weight	Output Tray	52 to 250 gsm
	Finisher Tray	52 to 250 gsm
	Booklet Tray	- / 60 to 105 gsm ^{*1}
Paper Capacity ^{*2}	Output Tray	500 sheets (A4)
	Finisher Tray	[Without Stapling] A4: 3000 sheets B4 or larger: 1500 sheets Mixed Size Stacking ^{*3} : 300 sheets [With Stapling] A4: 200 sets (single stapling), 100 sets (dual stapling), or 3000 sheets B4 or larger: 100 sets, or 1500 sheets Mixed Size Stacking ^{*3} : 70 sets or 200 sheets
	Booklet Tray	[Without Stapling] A4: 1500 sheets B4 or larger: 1500 sheets Mixed Size Stacking ^{*3} : 300 sheets [With Stapling] A4: 200 sets, or 1500 sheets B4 or larger: 100 sets, or 1500 sheets Mixed Size Stacking ^{*3} : 70 sets or 200 sheets
Staple	Capacity	50 sheets (90 gsm or less ^{*5})
	Paper Size	Max. A3, 11 x 17", Min. B5 LEF, 8 x 10" (203 x 254 mm)
	Position	Single stapling, Dual stapling
Punch ^{*6}	Number of Holes	2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications)
	Paper Size	A3, 11 x 17", B4, A4 ^{*7} , A4 LEF, Letter ^{*7} , Letter LEF, B5 LEF, 7.25 x 10.5" (184 x 267 mm), 8 x 10" (203 x 254 mm), 16K (194 x 267 mm), Covers A4 (223 x 297 mm), 9 x 11" (229 x 279 mm), 215 x 315 mm, 8.5 x 13" (216 x 330 mm), Legal, 11 x 15" (279 x 381 mm), 8K (267 x 388 mm)
	Paper Weight	52 to 200 gsm
Booklet Finishing	Capacity	Saddle Staple: 16 sheets ^{*8} Middle-Fold: 5 sheets Single Fold: 1 sheets
	Paper Size	Max.: A3, 11 x 17" Min.: B5
	Paper Weight	Saddle Staple: 60 to 105 gsm Middle-Fold: 60 to 105 gsm Single Fold: 60 to 105 gsm
Dimensions ^{*9}	W 788 x D 589 x H 1056 mm W 1023 x D 726 x H 1056 mm (When Folder Unit CD1 is installed)	W 850 x D 589 x H 1056 mm W 1082 x D 726 x H 1056 mm (When Folder Unit CD1 is installed)
Weight	48 kg 100 kg (When Folder Unit CD1 is installed)	65 kg 117 kg (When Folder Unit CD1 is installed)

Note: C3 Finisher requires Transport Unit S1.
 Note: C3 Finisher with Booklet Maker requires Transport Unit S1.
 *1: The basis weight of a cover sheet shall be equal to or less than 250 gsm. *2: 64 gsm paper. *3: When larger size sheets are stacked on top of smaller size sheets. *4: When the output paper size is the same.
 *5: Up to 65 sheets can be stapled when the C3 Finisher Staple Unit 65 Sheets is installed. However, depending on the paper type, incorrect stapling such as uneven edge alignment of sets may occur.
 *6: Optional. *7: 3-hole punch is not applicable. *8: Saddle Staple capacity varies depending on how heavy the cover is. Booklet may not be tightly closed depending on the size or type of the paper. *9: Inner connector within the body is excluded.

Notes
1) If the storage media (such as hard disk drives) of the base unit fail, loss of received data, accumulated data, registered setting data, etc. may occur. In no event shall Fuji Xerox be liable for any damages whatsoever arising from loss of data.
2) Functional spare parts will be available for at least 7 years after the product is no longer manufactured.
3) The product specifications, appearance and other details in this catalog are subject to change without notice for improvements.

All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies.

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law : Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. Unused postage stamps, post cards, etc. Certificate stamps stipulated by law. Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.

For more information or detailed product specification, please call or visit us at

Fuji Xerox Australia

101 Waterloo Road, Macquarie Park NSW 2113
 Tel. (02) 9856 5000 Fax. (02) 9856 5003
<http://www.fujixerox.com.au>

D2 Finisher / D2 Finisher with Booklet Maker (Optional)

Item	D2 Finisher	D2 Finisher with Booklet Maker
Type	Output Tray	Sort / Stack
	Finisher Tray	Sort (Offset available) / Stack (Offset available)
	Booklet Tray	- / Sort / Stack
Paper Size	Output Tray	Max.: A3, 12 x 18" (305 x 457 mm) Min.: Postcard (100 x 148mm)
	Finisher Tray	Max.: A3, 12 x 18" (305 x 457 mm) Min.: B5, 8 x 10"
	Booklet Tray	- / Max.: A3, 12 x 18" (305 x 457 mm) Min.: A4, Letter
Paper Weight	Output Tray	52 to 250 gsm
	Finisher Tray	52 to 200 gsm
	Booklet Tray	- / 60 to 220 gsm
Paper Capacity ^{*1}	Output Tray	500 sheets (A4)
	Finisher Tray	[Without Stapling] A4: 3000 sheets B4 or larger: 1500 sheets Mixed Size Stacking ^{*2} : 350 sheets [With Stapling] A4: 200 sets, or 3000 sheets B4 or larger: 100 sets, or 1500 sheets
	Booklet Tray	[Without Stapling] A4: 2000 sheets B4 or larger: 1500 sheets Mixed Size Stacking ^{*2} : 300 sheets [With Stapling] A4: 200 sets, or 2000 sheets B4 or larger: 100 sets, or 1500 sheets
Staple	Capacity ^{*1}	100 sheets (80 gsm or less) ^{*4}
	Paper Size	Max.: A3, 11 x 17" Min.: B5 LEF
	Position	Single stapling, Dual stapling, 4 place ^{*5}
Punch	Number of Holes	2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications) ^{*6}
	Paper Size	A3 ^{*6} , 11 x 17" ^{*6} , B4, A4, A4 LEF ^{*6} , Letter, Letter LEF ^{*6} , B5 LEF, 7.25 x 10.5" LEF (267 x 184 mm) ^{*6} , 8 x 10" (203 x 254 mm), 8 x 10" LEF (254 x 203 mm) ^{*6} , 16K LEF (267 x 194 mm) ^{*6} , Covers A4 LEF (223 x 297 mm) ^{*6} , 9 x 11" (229 x 279 mm) ^{*6} , 215 x 315 mm, 8.5 x 13" (216 x 330 mm), Legal, 11 x 15" (279 x 381 mm) ^{*6} , 8K (267 x 388 mm) ^{*6}
	Paper Weight	52 to 200 gsm
Booklet Finishing	Capacity	Saddle Staple: 15 sheets ^{*7} Middle-Fold: 5 sheets Single Fold: 1 sheets
	Paper Size	Max.: A3, 12 x 18" (305 x 457 mm) Min.: A4, Letter
	Paper Weight	Saddle Staple: 60 to 90 gsm ^{*8} Middle-Fold: 60 to 105 gsm Single Fold: 60 to 220 gsm
Interposer ^{*9}	Paper Size	Max. A3 Min. B5
	Paper Weight	64 to 220 gsm
	Paper Capacity ^{*1}	200 sheets
Power Supply ^{*10}	AC220-240 V +/- 10 %, 0.8 A, 50 / 60 Hz common	
Maximum Power Consumption	203 W or less (AC 220 - 240 V +/- 10 %)	
Dimensions	W 1045 x D 725 x H 1165 mm W 1245 x D 725 x H 1165 mm (With Folder Unit D2)	W 1050 x D 725 x H 1165 mm W 1250 x D 725 x H 1165 mm (With Folder Unit D2)
	Weight	105 kg 145 kg (With Folder Unit D2)

*1: 64 gsm paper. *2: When larger size sheets are stacked on top of smaller size sheets. *3: Paper may not be accepted depending on paper type and other usage conditions. *4: The staple capacity is 65 sheets for the size exceeding A4 or letter size. The capacity may be less than 100 for the paper heavier than 80 gsm. *5: 4 places stpling is available for A4 LEF, letter LEF only. *6: 4-hole punch is available for these sizes. *7: When cover is applied the maximum is 14 sheets. *8: Up to 220 gsm covers are supported, With 91 to 220 gsm cover, 64 to 80 gsm paper can be used for text pages. *9: Nothing will be printed on the sheets loaded in the Interposer. *10: Power supply separate from the main unit is required.



For Your Safety
 Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.

